



# 30PA65R-KO9AA

## (Type 17 RET Configuration Only)

**Top of antenna  
Viewed from rear**

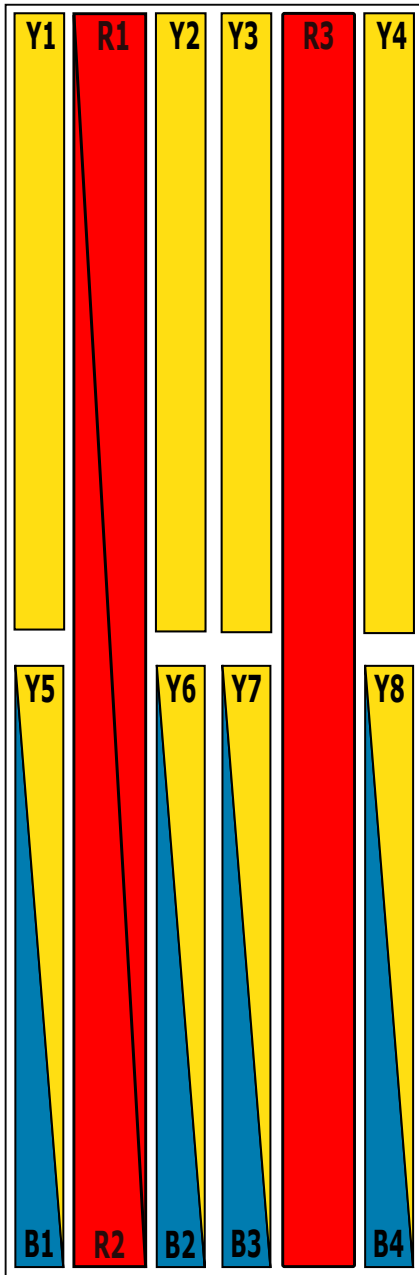

**RET placement  
as viewed from rear  
of antenna**

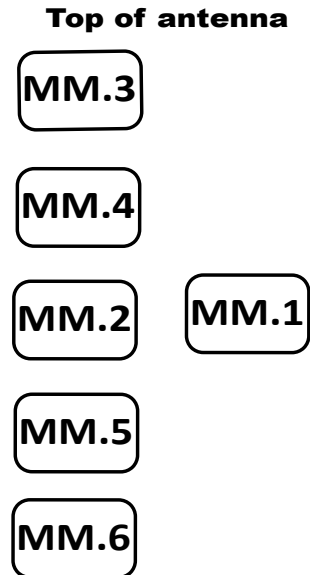

Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID
R3	1, 2	698-960	1, 2	C1xxxxxxMM.1
R1	11, 12	698-862	11, 12,	C1xxxxxxMM.2
R2	13, 14	880-960	13, 14	
Y1	3, 4	1427-2690	3, 4, 5, 6	C1xxxxxxMM.3
Y4	5, 6	1427-2690		
Y2	7, 8	1695-2690	7, 8, 9, 10	C1xxxxxxMM.4
Y3	9, 10	1695-2690		
B1	15, 16	1695-1880	15, 16, 17, 18, 23, 24, 25, 26	C1xxxxxxMM.5
B2	17, 18	1695-1880		
Y5	23, 24	2300-2690		
Y6	25, 26	2300-2690	19, 20, 21, 22, 27, 28, 29, 30	C1xxxxxxMM.6
B3	19, 20	1695-1880		
B4	21, 22	1695-1880		
Y7	27, 28	2300-2690		
Y8	29, 30	2300-2690		