




Filters & Combiners

DATA SHEET

Broadband Pentaplexer Combiner

5PR-6919203636-XXX

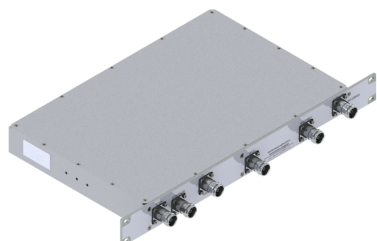

- The rackmounted Pentaplexer combines the frequency ranges 617-960 MHz, 1850-1995 MHz, 1695-1780/2110-2200MHz and 2 x 2305-2690 MHz onto a common port
- Supports the 600, 700, SMR, 850 and 900 bands on one port, AWS band on a second port, PCS band on a third port, and has two WCS/2600 band input ports
- High power 60 W per port with low insertion loss in a small, lightweight enclosure
- Low intermodulation with isolation of ≥ 50 dB between the frequency ranges and ≥ 25 dB between the twin WCS/2600 band inputs ports
- Indoor Rack Mount only
- High reliability of >500K Hours MTBF

Overview

The CCI Broadband Rackmount Pentaplexer, which is available in a Single configuration, combines the Tx/Rx signals of 617-960 MHz, PCS, AWS and two sets of WCS/BRS band inputs onto a common port. Specifically intended for use in multiband systems with limited feeder lines, this CCI Pentaplexer facilitates the addition of new technologies including LTE and new spectrum including AWS-3 and 600 MHz to existing sites. The Pentaplexer provides a minimum of 50 dB of isolation between each of the individual frequency ranges and a minimum of 25 dB of isolation between the two 2305-2690 band ports. By reducing the number of feeder lines, the cost to upgrade a site (tower loading, leasing and installation costs) is reduced.

The CCI Pentaplexer Combiner provides full band performance for each band with low insertion loss, low Intermodulation, and high power handling. Excellent return loss delivers the best match to the antennas and base station, saving precious transmit power. The Pentaplexer is fully outdoor rated and can be pole or wall mounted with an optional outdoor configuration.

Technical Description:

The Outdoor Broadband Pentaplexer Combiner consists of multiple filters to combine (or divide) full band 617-960 MHz, PCS, AWS and 2 x WCS/BRS signals. This tower mount unit can be used as either a splitter or combiner to aggregate multiple bands on a common feeder line. All RF ports are terminated in 4.3-10 connectors.

The filters have been designed to minimize insertion loss while maximizing isolation. Particular attention has been given to the intermodulation performance of the Broadband Pentaplexer to minimize any passive intermodulation products from occurring. The Pentaplexer is IP67 rated.

CCI filter and combiner products are designed and produced to ISO 9001 certification standards for reliability and quality at our state-of-the-art engineering and manufacturing facilities.



Filters & Combiners

SPECIFICATIONS

Broadband Pentaplexer Combiner

5PR-6919203636-XXX

Electrical Specification

RF Parameters	Ports	Frequency(MHz)	Specification
Return Loss	COM	617 - 960	18 dB min., 20 dB typ.
		1850 - 1995	18 dB min., 20 dB typ.
		1695 - 1780	18 dB min., 20 dB typ.
		2110 - 2200	18 dB min., 20 dB typ.
		2305 - 2690	18 dB min., 20 dB typ.
	LOW BAND	617 - 960	18 dB min., 20 dB typ.
	PCS	1850 - 1995	18 dB min., 20 dB typ.
	AWS	1695 - 1780	18 dB min., 20 dB typ.
		2110 - 2200	18 dB min., 20 dB typ.
	WCS/BRS1	2305 - 2690	18 dB min., 20 dB typ.
	WCS/BRS2	2305 - 2690	18 dB min., 20 dB typ.
Insertion Loss	COM to LOW BAND	617 - 960	0.15 dB max.
	COM to PCS	1850 - 1995	0.3 dB typ., 0.4 dB max.
	COM to AWS	1695 - 1780	0.3 dB typ., 0.35 dB max.
		2110 - 2200	0.3 dB typ., 0.35 dB max.
	COM to WCS/BRS1	2305 - 2690	3.55 dB typ., 3.7 dB max.
	COM to WCS/BRS2	2305 - 2690	3.55 dB typ., 3.7 dB max.
Rejection	COM to LOW BAND	1850 - 1995	50 dB min.
		1695 - 1780	50 dB min.
		2110 - 2200	50 dB min.
		2305 - 2690 (1)	50 dB min.
		2305 - 2690 (2)	50 dB min.
	COM to PCS	617 - 960	50 dB min.
		1695 - 1780	50 dB min.
		2110 - 2200	50 dB min.
		2305 - 2690 (1)	50 dB min.
		2305 - 2690 (2)	50 dB min.
	COM to AWS	617 - 960	50 dB min.
		1850 - 1995	50 dB min.
		2305 - 2690 (1)	50 dB min.
		2305 - 2690 (2)	50 dB min.
	COM to WCS/BRS1	617 - 960	53 dB min.
		1850 - 1995	53 dB min.
		1695 - 1780	53 dB min.
		2110 - 2180	53 dB min.
		2180 - 2200	48 dB min.
	COM to WCS/BRS2	2305 - 2690 (2)	25 dB min.
		617 - 960	53 dB min.
		1850 - 1995	53 dB min.
		1695 - 1780	53 dB min.
		2110 - 2180	53 dB min.
		2180 - 2200	48 dB min.
		2305 - 2690 (1)	25 dB min.



Filters & Combiners

SPECIFICATIONS

Broadband Pentaplexer Combiner

5PR-6919203636-XXX

General Characteristics	
Impedance	50 ohms
Continuous Average Power	60 W maximum per input port
Peak Envelope Power	1.2 kW maximum per input port, excluding WCS/BRS port which is 650 W
Intermodulation Performance(all ports)	<-117 dBm (-160 dBc) typical (2 x +43 dBm tones) all bands
DC Pass Current/AISG Pass	Not applicable

Environmental Specification

Operating Temperature	-40 °C to +65 °C
Enclosure & Connectors	IP67
Relative Humidity	0 - 99%
MTBF	>500,000 hours
Lightning Protection	8/20us, ±10KA max, 10 strikes each, IEC61000-4-5

Mechanical Specification

Connectors	6 x 4.3-10 female
Housing Dimensions	10.24 x 15.24 x 1.65 in. (260 x 387 x 42 mm)
Dimensions w/Front Panel	10.39 x 15.24 x 1.69 in. (264 x 340 x 43 mm)
Weight	16.6 lbs (7.54 kg)
Mounting	Rackmount




Filters & Combiners

SPECIFICATIONS


Broadband Pentaplexer Combiner

5PR-6919203636-XXX

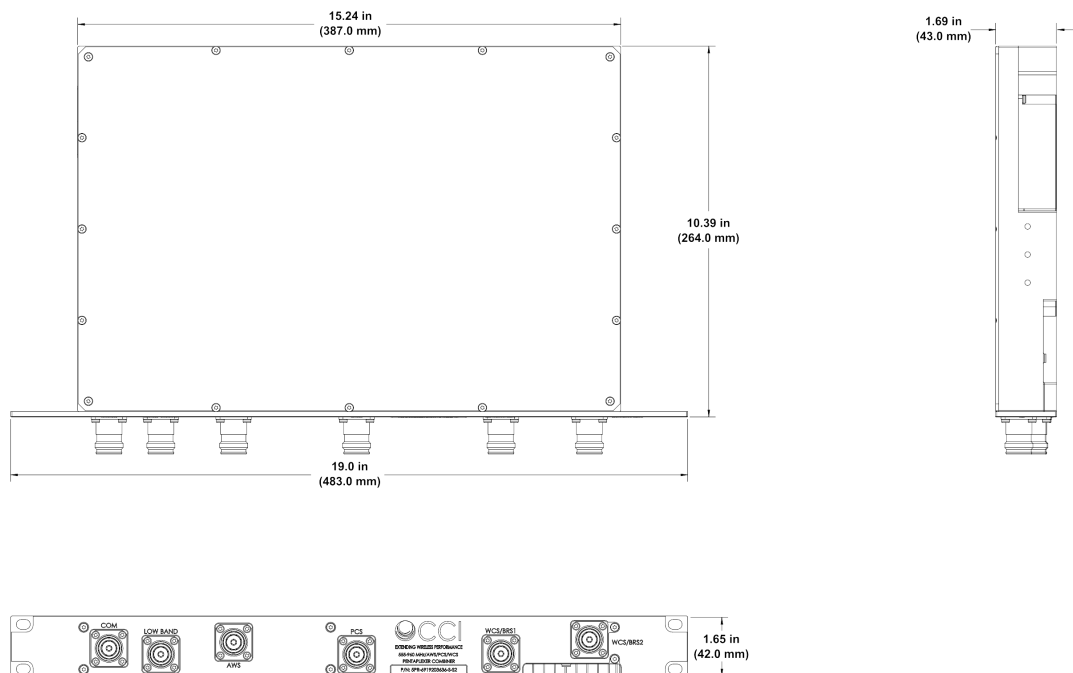

Broadband Pentaplexer (5PR-6919203636-0-S2) Outline Drawing

Block Diagram

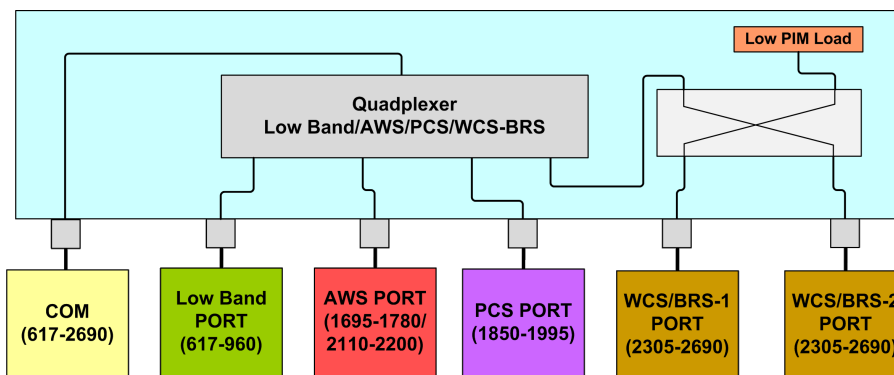

Broadband Rackmount Pentaplexer (5PR-6919203636-0-S2) Block Diagram



Filters & Combiners

STANDARDS & CERTIFICATIONS

Broadband Pentaplexer Combiner

5PR-6919203636-XXX

Parts & Accessories

5PR-6919203636-0-S2 Rackmount Pentaplexer with 4.3-10 connectors (no DC or AISG Pass through)

Standards & Compliance

Safety	EN 60950-1, UL 60950-1
Emission	EN 55022
Immunity	EN 55024
Environmental	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-5, IEC 60068-2-6, IEC-60068-2-11, IEC 60068-2-14, IEC 60068-2-18, IEC 60068-2-27, IEC 60068-2-29, IEC 60068-02-30, IEC 60068-2-52, IEC 60068-2-64, IEC61000-4-5, GR-63-CORE 4.3.1, EN 60529 IP67, IP68

Certifications

Federal Communication Commission (FCC) Part 15 Class B, CE, CSA US, ISO 9001



CCI Communication Components Inc.
EXTENDING WIRELESS PERFORMANCE