



Antennas

DATA SHEET

Ultra-Wideband Bi-Sector™ Array

BSA-M65R-UV-H8



- Eight foot (2.3 m), eight port, dual beam antenna with patented asymmetrical beam shapes optimized for LTE
- Four wideband 33° beams to match existing 65° patterns; one pair of beams covering 1695-2400 MHz and the other pair covering 2300-2690 MHz
- Ultra-wideband performance yields uncompromised antenna patterns in each of the 1695-2400 MHz and 2300-2690 MHz bands while eliminating the need for diplexing to deploy both bands simultaneously
- One pair of +45° and -45° cross-polarized ports for each beam
- Slim and low weight single panel design supporting two beams in a single antenna
- Field replaceable, integrated AISG 2.0 compliant Remote Electrical Tilt (RET) system with independent tilt control for each beam
- Dramatic increase in site capacity through higher order sectorization which offsets the need to build new sites
- Boosts data throughput by minimizing interference and optimizing coverage
- Sharp elevation beamwidth aides in network planning
- Optimal elevation sidelobe performance
- Exceeds minimum PIM performance requirements

Overview

The CCI ultra-wideband Bi-Sector™ array is a dual beam antenna with full DCS, PCS, 2100 UMTS, AWS and WCS band coverage. With two pairs of wideband ports covering 1710-2400 MHz and another two pairs covering 2300-2690 MHz, this eight foot (2.3 m) CCI Bi-Sector™ provides the capability to deploy not only two beams (sectors) in a single antenna but two beams for multiple frequency bands without the need for diplexing. The antenna allows separate tilt control for each beam individually, enabling maximum flexibility in network deployment.

CCI's unique patented bi-sector technology provides optimized overlap between the pairs of asymmetric beams, lowers soft handover losses in LTE, UMTS/HSPA+ and CDMA/EVDO systems, while minimizing interference between sectors. Fast roll-off of each of the outer beams and high front-to-back ratios ensure reduced interference. This patented approach enhances data transfer rates within LTE, UMTS and EVDO network sectors and addresses "hotspots" in mobile wireless operator networks. The single panel design of the Bi-Sector™ Array offers the opportunity to reduce antenna count and directly replaces an existing 65° antenna without mount changes and avoids costly leasing and zoning changes. The enhanced coverage matches the existing sector footprint and minimizes the need for optimization and adjacent site changes, providing operators with significant CAPEX and OPEX cost savings.

CCI antennas are designed and produced to ISO 9001 certification standards for reliability and quality in our state-of-the-art manufacturing facilities.

Applications

- Delivers increased capacity and data-throughput for sites that are performance or capacity constrained
- Provides a higher level of spectrum reuse making it an ideal solution for spectrum limited markets
- Increase capacity without the need for new site builds or carrier adds and without using valuable spectrum resources
- Efficient use of spectrum make it ideally suited for spectrum clearing and refarming



Antennas

DATA SHEET

Ultra-Wideband Bi-Sector™™ Array

BSA-M65R-UV-H8



Antennas

SPECIFICATIONS

Ultra-Wideband Bi-Sector™™ Array

BSA-M65R-UV-H8

Electrical


Ports	4 High Band Ports for 1695-2400 MHz				4 High Band Ports for 2300-2690 MHz	
Frequency Range	1695-1880 MHz	1850-1990 MHz	1920-2180 MHz	2300-2400 MHz	2300-2400 MHz	2496-2690 MHz
Gain	17.9 dBi	18.5 dBi	19.0 dBi	19.3 dBi	18.6 dBi	19.0 dBi
Azimuth Beamwidth (-3dB)	35°	33°	31°	26°	33°	30°
Elevation Beamwidth (-3dB)	7.3°	6.6°	6.3°	5.8°	6.5°	6.2°
Electrical Downtilt	0° to 10°	0° to 10°	0° to 10°	0° to 10°	0° to 9°	0° to 9°
Elevation Sidelobes (1st Upper)	< -19 dB	< -19 dB	< -19 dB	< -19 dB	< -19 dB	< -19 dB
Front-to-Back Ratio @180°	> 35 dB	> 35 dB	> 35 dB	> 33 dB	> 35 dB	> 35 dB
Front-to-Back Ratio over ± 20°	> 35 dB	> 33 dB	> 33 dB	> 33 dB	> 33 dB	> 33 dB
Cross-Polar Discrimination (at Peak)	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB	> 25 dB
Cross-Polar Port-to-Port Isolation	> 30 dB	> 30 dB	> 30 dB	> 30 dB	> 30 dB	> 30 dB
Voltage Standing Wave Ratio(VSWR)	< 1.4:1	< 1.4:1	< 1.4:1	< 1.5:1	< 1.4:1	< 1.4:1
Passive Intermodulation (2x20W)	≤ -150 dBc	≤ -150 dBc	≤ -150 dBc	≤ -150 dBc	≤ -150 dBc	≤ -150 dBc
Input Power Continuous Wave (CW)	300 watts	300 watts	300 watts	300 watts	300 watts	300 watts
Polarization	Dual Pol 45°	Dual Pol 45°	Dual Pol 45°	Dual Pol 45°	Dual Pol 45°	Dual Pol 45°
Input Impedance	50 ohms	50 ohms	50 ohms	50 ohms	50 ohms	50 ohms
Lightning Protection	DC Ground	DC Ground	DC Ground	DC Ground	DC Ground	DC Ground

Mechanical

Dimensions (LxWxD)	91.4x12.9x6.2 in (2322x328x158 mm)
Survival Wind Speed	> 150 mph (> 241 kph)
Front Wind Load	294 lbs (1309 N) @ 100 mph (161 kph)
Side Wind Load	167 lbs (745 N) @ 100 mph (161 kph)
Equivalent Flat Plate Area	11.5 ft² (1.1 m²)
Weight*	51.8 lbs (23.5 kg)
RET System Weight	6.6 lbs (3.0 kg)
Connector	8 x 7-16 DIN female long neck
Mounting Pole	2 to 5 in (5 to 12 cm)

* Weight excludes mounting and RET

Bottom View

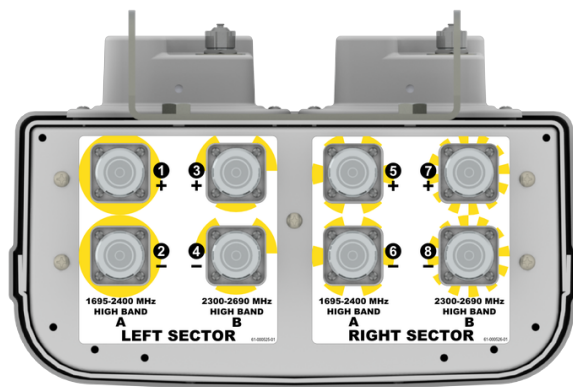

RET Connection Diagram

**CONNECT RET ACTUATORS
AS SHOWN BELOW**





Antennas


SPECIFICATIONS

Ultra-Wideband Bi-Sector™™ Array

BSA-M65R-UV-H8

Mechanical

Connector Spacing

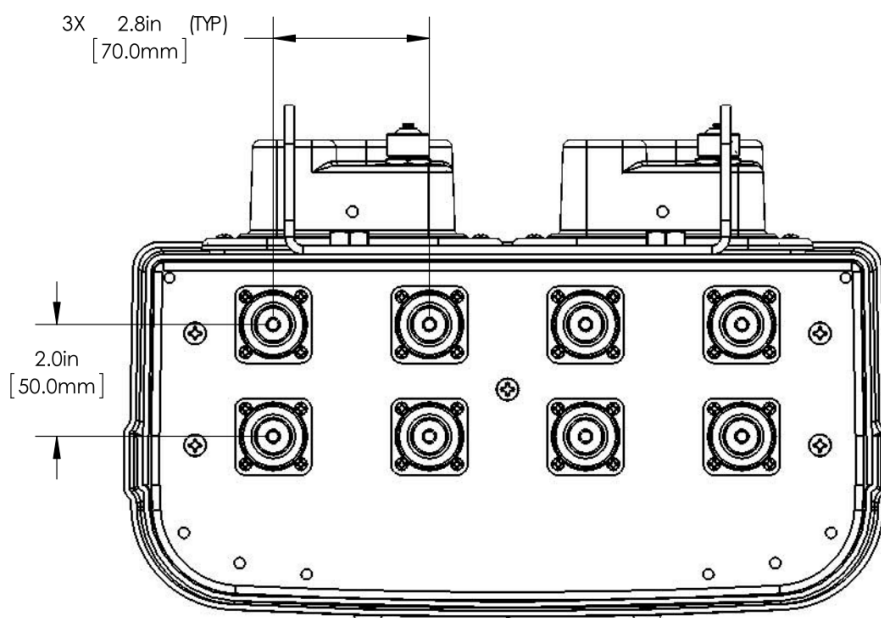



Antennas


SPECIFICATIONS

Ultra-Wideband Bi-Sector™™ Array


BSA-M65R-UV-H8

Typical Antenna Patterns


For detailed information on additional antenna patterns, contact customer support at support@cciprducts.com

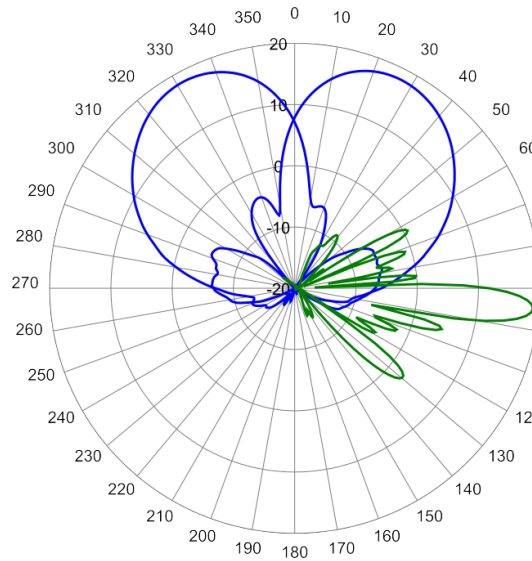


1878 MHz Azimuth and 5° Elevation

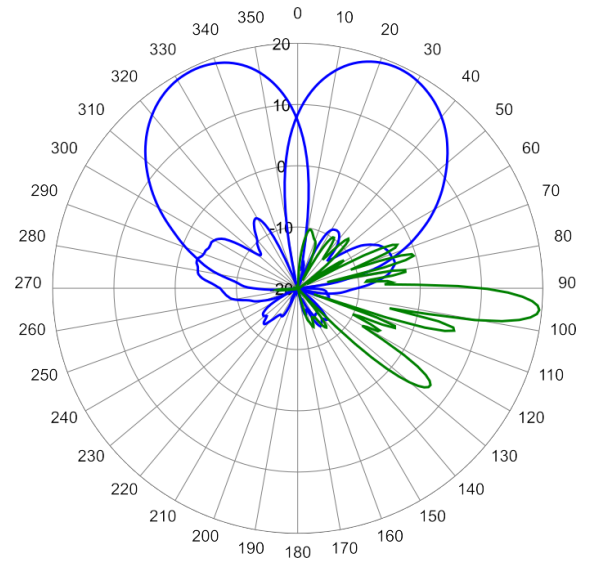

2110 MHz Azimuth and 5° Elevation

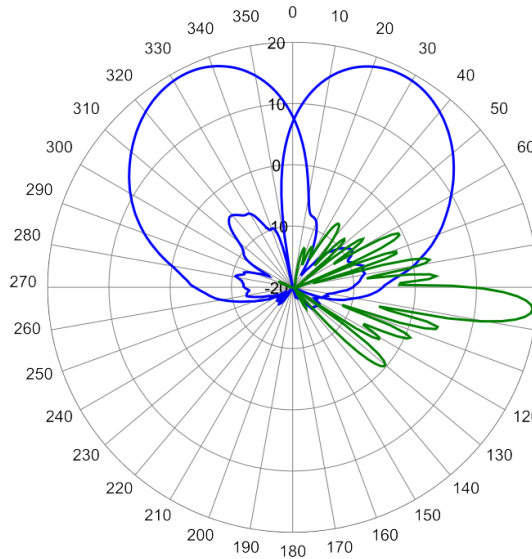

2350 MHz Azimuth and 5° Elevation

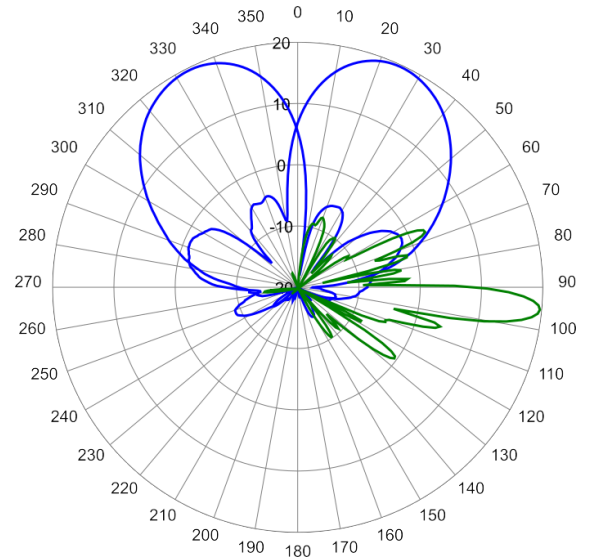

2600 MHz Azimuth and 5° Elevation



Antennas

ORDERING

Ultra-Wideband Bi-Sector™™ Array

BSA-M65R-UV-H8

Parts & Accessories

BSA-M65R-UV-H8	8 foot (2.3 m) Bi-Sector™ Multi-band Antenna with 4 factory installed BSA-RET200 RET actuators
BSA-M65V-UV-H8	8 foot (2.3 m) Bi-Sector™ Multi-band Antenna with 4 factory installed manual knobs
BSA-M65R-UV-H8-K	Antenna kit with 4 factory installed RET actuators and MBK-01 mounting bracket
BSA-M65V-UV-H8-K	Antenna kit with 4 factory installed manual knobs and MBK-01 mounting bracket
MBK-01	Mounting bracket kit (top and bottom) with 0° to 10° mechanical tilt adjustment
BSA-RET200	Remote electrical tilt actuator
OPA-CBK-AG-RRU	OctoPort antenna to RRU AISG cable kit
OPA-CBK-RA-AG-RRU	OctoPort antenna to RRU AISG right angle cable kit



Antennas


ACCESSORIES

Mounting Bracket Kit


MBK-01

Mechanical


Weight	12.6 lbs (5.7 kg)
Hinge Pitch	47.25 in (1200 mm)
Mounting Pole Dimension	2 to 5 in (5 to 12 cm)
Fastener Size	M12
Installation Torque	40 ft·lb (54 N·m)
Mechanical Tilt Adjustment	0° - 10°



MBK-01 Top Adjustable Bracket

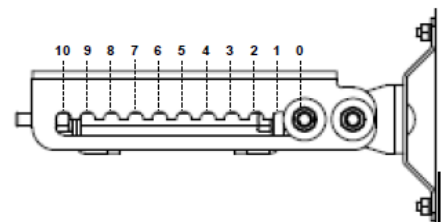

MBK-01 Top Adjustable Bracket Side View

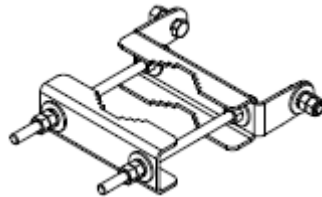

MBK-01 Bottom Fixed Bracket



Antennas

ACCESSORIES

Remote Electrical Tilt Actuator (RET)

BSA-RET200

General Specifications

Part Number	BSA-RET200
Protocols	AISG 2.0
RET Type	Type 1
Adjustment Cycles	>10,000 cycles
Tilt Accuracy	$\pm 0.1^\circ$
Temperature Range	-40° C to 70° C


Electrical

Data Interface Signal	DC
Input Voltage	10-30 Vdc
Current Consumption Tilt	120 mA at $V_{in}=24$
Current Consumption Idle	55 mA at $V_{in}=24$
Hardware Interface	AISG-RS 485 A/B
Input Connector	Male 1 × 8 pin Daisy Chain
Output Connector	Female 1 × 8 pin Daisy Chain

Mechanical

Dimensions (LxWxD)	8.0x5.0x2.0 in. (213x135x51 mm)
Housing	ASA/ABS/Aluminum
Weight	1.7 lbs (0.75 kg)

ASA= Acrylic Styrene Acrylonitrile
ABS=Acrylonitrile Butadiene Styrene

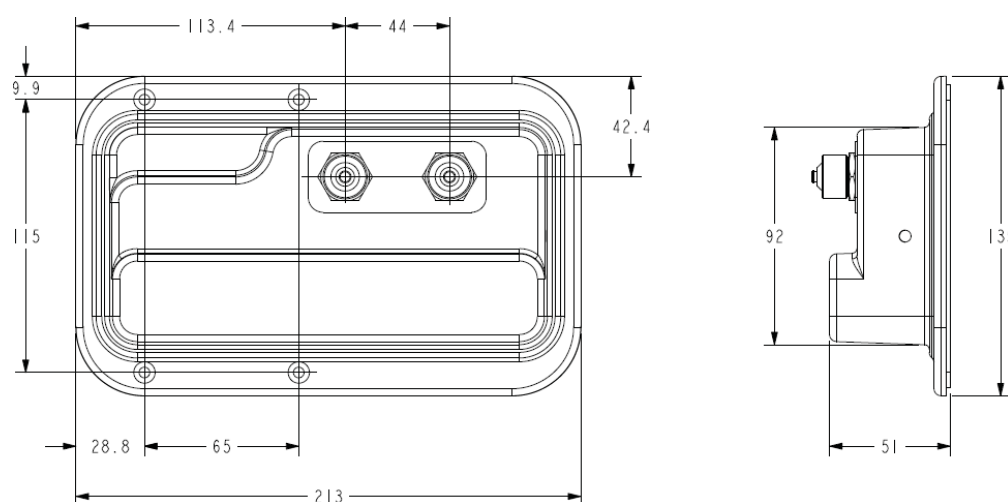



Antennas

ACCESSORIES

AISG Cable Kit


OPA-CBK-AG-RRU

Electrical Specifications

Individual Cable Part Number	AISGC-M-F-18	AISGC-M-F-10FT
Cable style	UL2464	UL2464
Protocol	AISG 1.1 and AISG 2.0	AISG 1.1 and AISG 2.0
Maximum voltage	300 V	300 V
Rated current	5 A at 104° F (40° C)	5 A at 104° F (40° C)

Mechanical Specifications

Individual Cable Part Number	AISGC-M-F-18	AISGC-M-F-10FT
Cables per kit	3	2
Connectors	2 x 8 pin IEC 60130-9 Straight male/straight female	2 x 8 pin IEC 60130-9 Straight male/straight female
Tightening torque	Hand tighten only ≈ 1.84 ft-lbs (2.5 N-m)	Hand tighten only ≈ 1.84 ft-lbs (2.5 N-m)
Construction	Shielded (Tinned Copper Braid)	Shielded (Tinned Copper Braid)
Braid coverage	85%	85%
Jacket Material	Matte Polyurethane (Black)	Matte Polyurethane (Black)
Conductors	1 twisted pair - 24 AWG 3 conductors - 19 AWG AWM style 2464	1 twisted pair - 24 AWG 3 conductors - 19 AWG AWM style 2464
Cable Diameter	0.307 in (7.8 mm)	0.307 in (7.8 mm)
Length	18 - 20 in (457 - 508 mm)	120 in (3048 mm)
Weight	0.27 lbs (0.12 kg)	0.69 lbs (.31 kg)
Minimum bend radius	3.9 in (100 mm)	3.9 in (100 mm)

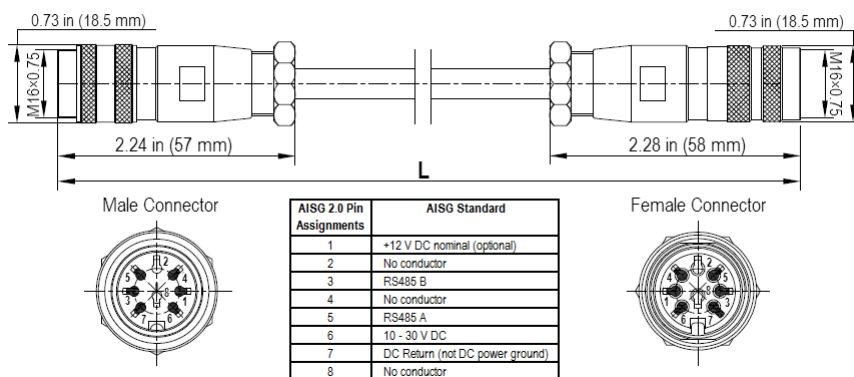

AISG-Male to AISG-Female Jumper Cable

Environmental Specifications

Individual Cable Part Number	AISGC-M-F-18	AISGC-M-F-10FT
Temperature Range	-40° to 80° C	-40° to 80° C
Flammability	UL 1581 VW-1	UL 1581 VW-1
Ingress Protection	IEC 60529:2001, IP67	IEC 60529:2001, IP67



Antennas

ACCESSORIES

AISG Cable Kit


OPA-CBK-RA-AG-RRU

Electrical Specifications

Individual Cable Part Number	AISGC-MRA-FRA-20	AISGC-M-FRA-10FT
Cable style	UL2464	UL2464
Protocol	AISG 1.1 and AISG 2.0	AISG 1.1 and AISG 2.0
Maximum voltage	300 V	300 V
Rated current	5 A at 104° F (40° C)	5 A at 104° F (40° C)

Mechanical Specifications

Individual Cable Part Number	AISGC-MRA-FRA-20	AISGC-M-FRA-10FT
Cables per kit	3	2
Connectors	2 x 8 pin IEC 60130-9 Right angle male/right angle female	2 x 8 pin IEC 60130-9 Straight male/right angle female
Tightening torque	Hand tighten only ≈ 1.84 ft-lbs (2.5 N·m)	Hand tighten only ≈ 1.84 ft-lbs (2.5 N·m)
Construction	Shielded (Tinned Copper Braid)	Shielded (Tinned Copper Braid)
Braid coverage	85%	85%
Jacket Material	Matte Polyurethane (Black)	Matte Polyurethane (Black)
Conductors	1 twisted pair - 24 AWG 3 conductors - 19 AWG AWM style 2464	1 twisted pair - 24 AWG 3 conductors - 19 AWG AWM style 2464
Cable Diameter	0.307 in (7.8 mm)	0.307 in (7.8 mm)
Length	20 in (508 mm)	120 in (3048 mm)
Weight	0.23 lbs (0.10 kg)	0.77 lbs (0.35 kg)
Minimum bend radius	3.9 in (100 mm)	3.9 in (100 mm)

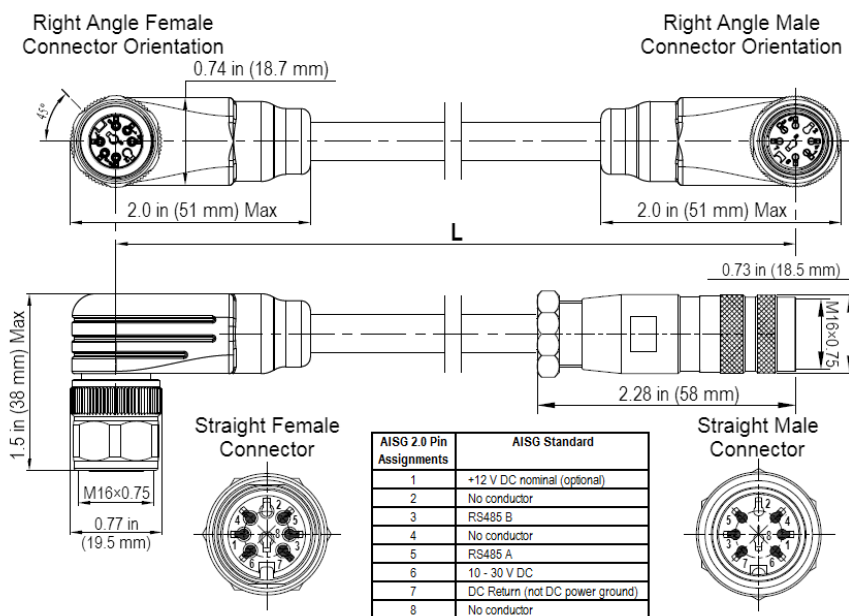

Right Angle to Right Angle and Right Angle to Straight Jumper Cable



Antennas

ACCESSORIES

AISG Cable Kit

OPA-CBK-RA-AG-RRU

Environmental Specifications

Individual Cable Part Number	AISGC-MRA-FRA-20	AISGC-M-FRA-10FT
Temperature Range	-40° to 80° C	-40° to 80° C
Flammability	UL 1581 VW-1	UL 1581 VW-1
Ingress Protection	IEC 60529:2001, IP67	IEC 60529:2001, IP67



Antennas

STANDARDS & CERTIFICATIONS

Ultra-Wideband Bi-Sector™™ Array

BSA-M65R-UV-H8

Standards & Compliance

Safety	EN 60950-1, UL 60950-1
Emission	EN 55022
Immunity	EN 55024
Environmental	IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-5, IEC 60068-2-6, IEC-60068-2-11, IEC 60068-2-14, IEC 60068-2-18, IEC 60068-2-27, IEC 60068-2-29, IEC 60068-02-30, IEC 60068-2-52, IEC 60068-2-64, GR-63-CORE 4.3.1, EN 60529, IP 24

Certifications

Antenna Interface Standards Group (AISG), Federal Communication Commission (FCC) Part 15 Class B, CE, CSA US, ISO 9001



CCI Communication Components Inc.
EXTENDING WIRELESS PERFORMANCE