



20HBSAR-BU9NBB

(Type 17 RET Configuration Only)

**Top of antenna
Viewed from rear**

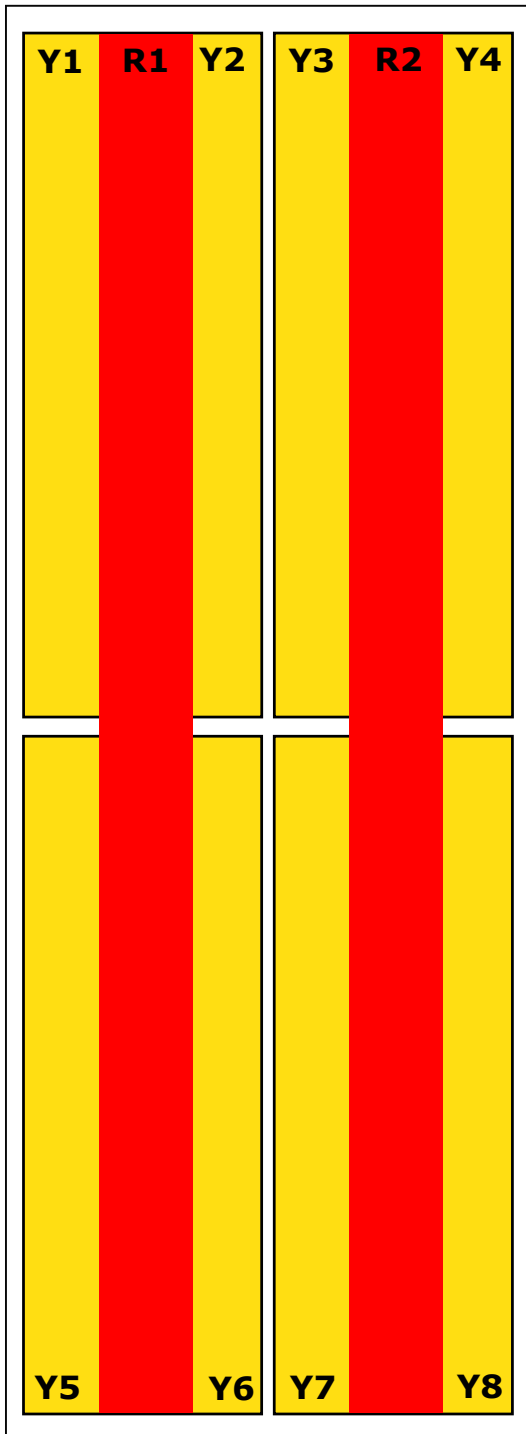

**RET placement
as view from rear
of antenna**

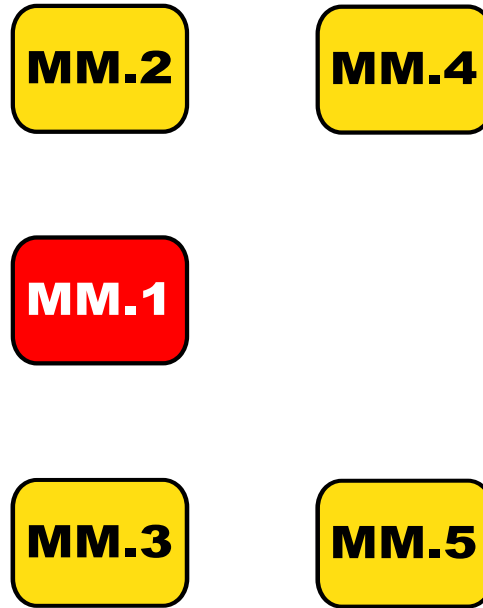

Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID
R1	1, 2	698-896	1, 2, 3, 4	ClxxxxxxxxMM.1
R2	3, 4	698-896		
Y1	5, 6	1695-2400	5, 6, 7, 8 Left Beam Top	ClxxxxxxxxMM.2
Y3	7, 8	1695-2400		
Y5	9, 10	1695-2400	9, 10, 11, 12 Left Beam Bottom	ClxxxxxxxxMM.3
Y7	11, 12	1695-2400		
Y2	13, 14	1695-2400	13, 14, 15, 16 Right Beam Top	ClxxxxxxxxMM.4
Y4	15, 16	1695-2400		
Y6	17, 18	1695-2400	17, 18, 19, 20 Right Beam Bottom	ClxxxxxxxxMM.5
Y8	19, 20	1695-2400		