
BSA33R-BW6BA (Type 17 RET Configuation Only)

Top of antenna Viewed from rear



RET placement as view from rear of antenna

Top of antenna

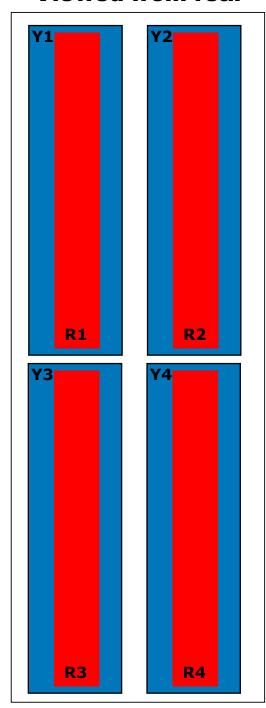







Array	Ports	Freq (MHz)	Ports controlled by common RET	AISG RET UID
R1	1, 2	698-896	1, 2, 3, 4	Claraman NANA 4
R3	3, 4	698-896	(Left Beams)	ClxxxxxxxMM.1
R2	5, 6	698-896	5, 6, 7, 8	CI
R4	7, 8	698-896	(Right Beams)	ClxxxxxxxMM.2
Y1	9, 10	1695-2180	9, 10, 11, 12	Changaga NANA 2
Y2	11, 12	1695-2180	(Left Beams)	ClxxxxxxxMM.3
Y3	13, 14	1695-2180	13, 14, 15, 16	Classical Anna A
Y4	15, 16	1695-2180	(Right Beams)	ClxxxxxxxMM.4

