



Antennas

DATA SHEET

AISG Cable Kit

CBK-RA-AG-RRU-003



- AISG 1.1 and 2.0 compliant control cables
- Offset keying for right angle cables
- IP67 outdoor ingress protection (when properly mated)
- Flame retardant per UL 1581 VW-1
- Matte polyurethane jacket (Black)
- Connectors 2 x 8 pin (male/female) per IEC 60130-9
- Tinned copper braid shield material

Overview

CCI's Three RET antenna to remote radio unit (RRU) AISG Cable Kits provides all the required cables for the successful deployment of CCI's models that have larger Remote Electrical Tilt (RET) actuators spacing then normal. All of the control cables included in the kit are AISG 1.1 and AISG 2.0 compliant.

AISG control can be configured in several ways. Depending on your requirements, a single RRU can be designated as the AISG controller whereby it controls both the high band ports and low band ports of the antenna. Another configuration will allow a low band RRU to control the low band antenna ports and a high band RRU to control the high band ports of the antenna. The AISG cable kit provides all the necessary cables to enable both of the above configurations. The 10 foot AISG cables enable connection from the RRU to the antenna, while the 27" and 36" AISG cables are for daisy chaining between RET actuators.



Antennas

AISG Cable Kit


CBK-RA-AG-RRU-003

SPECIFICATIONS

Electrical/Mechanical/Environmental Specifications

	RET to RET Cables		RRU to Antenna Cables
Individual Cable Part Number	AISGC-MRA-FRA-27	AISGC-MRA-FRA-36	AISGC-M-FRA-10FT
Cable style	UL2464		
Protocol	AISG 1.1 and AISG 2.0		
Maximum voltage	300 V		
Rated current	5 A at 104° F (40° C)		
Temperature Range	-40° to 80° C		
Flammability	UL 1581 VW-1		
Ingress Protection	IEC 60529:2001, IP67		
Tightening torque	Hand tighten only ≈ 1.84 ft-lbs (2.5 N-m)		
Construction	Shielded (Tinned Copper Braid)		
Braid coverage	85%		
Jacket Material	Matte Polyurethane (Black)		
Conductors	1 twisted pair - 24 AWG 3 conductors - 19 AWG AWM style 2464		
Cable Diameter	0.307 in (7.8 mm)		
Minimum bend radius	3.9 in (100 mm)		
Connectors	2 x 8 pin IEC 60130-9 Right angle male/right angle female		2 x 8 pin IEC 60130-9 Straight male/right angle female
Length	27 in (685 mm)	36 in (914 mm)	120 in (3048 mm)
Weight	0.20 lbs (0.09 kg)	0.23 lbs (0.10 kg)	0.77 lbs (0.35 kg)
Cables per kit	1	1	2

Mechanical Specifications

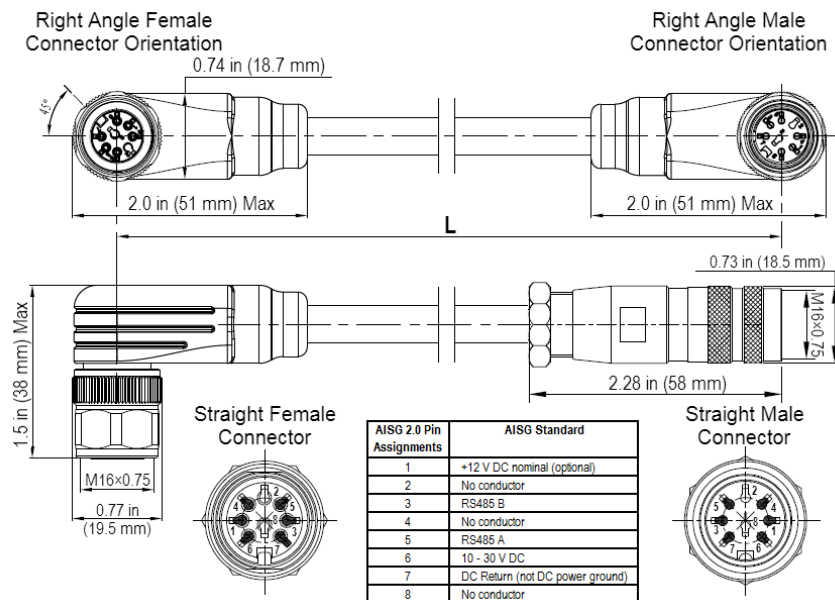

Right Angle to Right Angle and Right Angle to Straight Jumper Cable



Antennas

ORDERING

AISG Cable Kit

CBK-RA-AG-RRU-003

Parts & Accessories

Kit Part Number	CBK-RA-AG-RRU-003
Number of Cables	4
Overall Length	303 in (7695 mm)
Overall Weight	2.0 lbs (0.9 kg)